

SRP-E300

Stampante POS da 3 pollici



Kiosk



Retail



Restaurants
& Bars




Ticketing



Banking

Durevole ed economica

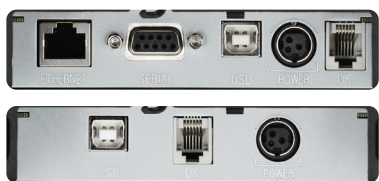


Cost-Efficiency

- Economic USB only version
- All in one Plus™ Interface
USB V2.0 FS + Ethernet + Serial
- PModalità risparmio carta,
riducendo la lunghezza di una
ricevuta fino al 25%
- Energy star certified



Prestazioni di stampa affidabili

- Velocità di stampa fino a 220 mm/sec
- Meccanismo ad alta affidabilità:
150 km TPH e 1,5 milioni di tagli Taglierina
automatica
- 180/203 dpi supportati

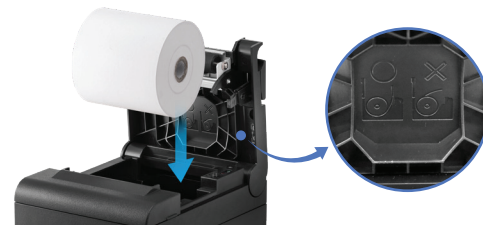

Design intuitivo

- Utilizzo autonomo o con montaggio a parete
salvaspazio
- Facile distinguere il lato di caricamento della carta
disegnando sul coperchio della stampante
10% più piccolo dell'SRP-330II
- Visualizza carta ed errore sul LED



BIXOLON®
a Better Solution for your Business™

SRP-E300

Stampante POS da 3 pollici



Specifications

Print Characteristics

Print Method

Direct Thermal (Top / Front Exit)

Print Speed

220 mm/sec

Print Resolution

SRP-E300 : 180dpi

SRP-E302 : 203dpi

Print Width

72mm

Sensor

Paper End

Media Characteristics

Media Type

Receipt

Media Width

80 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

132 x 182.4 x 128.5 mm

(5.19 x 7.18 x 5.05 inch)

Weight

1.23kg (2.71 lbs)

Power

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

Memory

64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

① USB V2.0 FS

② USB V2.0 FS + Ethernet + Serial

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

150 km

Auto Cutter

1.5 Million Cuts

*** Specified Paper

- TF50KS-E (Paper thickness: 65μm)

: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75μm)

: New Oji Paper Mfg. Co., Ltd

- PD 160R (Paper thickness: 75μm)

: New Oji Paper Mfg. Co., Ltd.

- P350 (Paper thickness: 62μm)

: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation

BXL / POS

Driver / Utility

- Windows Driver
- OPOS / JPOS Driver
- Linux / Mac CUPS Driver
- Virtual COM USB Driver
- Utility Program

SDK / Plugin

- Android / iOS / Windows SDK
- Linux SDK
- Xamarin SDK
- Chrome SDK
- Cordova Plugin

Browser / App

- Windows mPrint Browser (All)
- mPrint App (Android, iOS)

Fonts / Graphics / Symbolologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-E300: Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-E302: Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 35 page

International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbolologies

1D: Coda Bar, Code39, Code93, Code128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR Code

Accessories

Standard Accessories

USB A-B Cable

Optional Accessories

External buzzer, B-Melodist

